

INTRODUCING THE **SELECT SERIES**

BY IMM BOAT LIFTS

- 10 Year Structural Warranty gives peace of mind
- Permanently Lubricated Pulley Bearings reduce user maintenance
- Maintenance Free no slip chain drive, the heavy duty choice in all large machinery
- Sealed Oil Bath Gear Reducer
- Weatherproof Motor provides extreme reliability
- Patented Wedge Lock cable attachment makes height adjustment easy
- Welded For Structural Integrity

**select
series**



**IMM
BOATLIFTS**

For Our Nearest Dealer, Call Toll Free : (800) 669-3515
To Learn More About Our Products, Please Visit Us On The Web @ www.immboatlifts.com

| Lift Capacity | A | B | C | Rec. Piling Sizes |
|---------------|------|------|----------|-------------------|
| 4,500 lb | 132" | 120" | 178.375" | 8" dia. |
| 7,000 lb. | 144" | 144" | 203.625" | 8" dia. |
| 10,000 lb | 144" | 150" | 208" | 8" dia. |
| 13,000 lb | 144" | 150" | 208" | 8" dia. |
| 16,000 lb | 144" | 168" | 221.25" | 10" dia. |
| 20,000 lb. | 168" | 192" | 255.125" | 10" dia. |
| 27,000 lb. | 192" | 192" | 271.50" | 10" dia. |
| Capacity | A | B | C | D |
| 32,000 lb. | 84" | 216" | 231.75" | 10" dia. |




17030 Alico Center Rd.

Fort Myers, FL 33967

Tele: 239-454-7020 - Fax: 239-454-8641

Toll Free: 800-669-3515

*IMM Boat Lifts will require information from the naval architect or boat builder to calculate correct spacing for dimension "D". Standard spacing for "D" is 288" unless we receive other information.

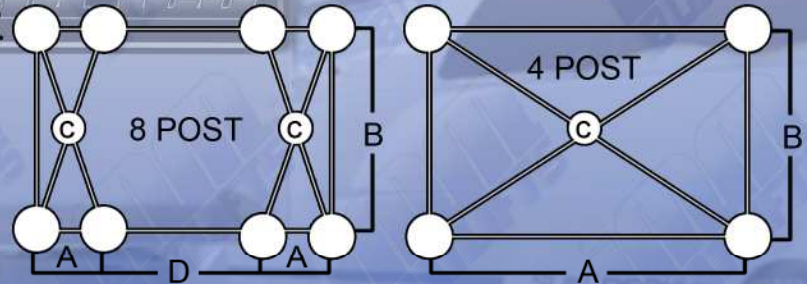

| STANDARD | 4500 | 7000 | 10000 | 13000 | 16000 | 20000 | 27000 | 32000 |
|----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| TOP BEAM CHANNEL SIZE | 5" X 2.00" | 6" X 2.00" | 7" X 2.00" | 8" X 2.00" | 11" X 2.00" | 11" X 2.00" | 14" X 2.00" | 11" X 2.00" |
| TOP BEAM OVERALL SIZE | 5" X 8 3/8" | 6" X 8 3/8" | 7" X 8 3/8" | 8" X 8 3/8" | 11" X 8 3/8" | 11" X 8 3/8" | 14" X 8 3/8" | 11" X 8 3/8" |
| NUMBER OF BEARINGS | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 20 |
| GROOVED CABLE WINDER LENGTH | 2 3/8" DIA. X 16" LONG | 2 3/8" DIA. X 16" LONG | 2 3/8" DIA. X 19" LONG | 2 3/8" DIA. X 19" LONG | 2 3/8" DIA. X 19" LONG | 2 3/8" DIA. X 23" LONG | 2 3/8" DIA. X 23" LONG | 2 3/8" DIA. X 19" LONG |
| DRIVE SHAFT SIZE | 1 15/16" O.D. GALV. PIPE | 1 15/16" O.D. GALV. PIPE | 1 15/16" O.D. GALV. PIPE | 1 15/16" O.D. GALV. PIPE | 1 15/16" O.D. GALV. PIPE | 1 15/16" O.D. GALV. PIPE | 1 15/16" O.D. GALV. PIPE | 1 15/16" O.D. GALV. PIPE |
| CHAIN SIZE | # 50 | # 50 | # 50 | # 50 | # 60 | # 60 | # 60 | # 60 |
| DRIVE SHAFT SPROCKET | 60 TOOTH | 60 TOOTH | 60 TOOTH | 60 TOOTH | 50 TOOTH | 50 TOOTH | 50 TOOTH | 50 TOOTH |
| GEAR DRIVE SPROCKET | 11 TOOTH | 9 TOOTH | 11 TOOTH | 9 TOOTH | 12 TOOTH | 12 TOOTH | 10 TOOTH | 12 TOOTH |
| SEALED OIL BATH GEAR REDUCER | 60:1 | 60:1 | 60:1 | 60:1 | 60:1 | 60:1 | 60:1 | 60:1 |
| NO. OF MOTORS & HORSE POWER | (2) 3/4 H.P. | (2) 3/4 H.P. | (2) 3/4 H.P. | (2) 3/4 H.P. | (2) 1 H.P. | (2) 1 H.P. | (2) 1 H.P. | (4) 1 H.P. |
| MOTOR VOLTAGE & AMPS (PER MOTOR) | 120 V 11.4 AMPS 240 V 5.7 AMPS | 120 V 11.4 AMPS 240 V 5.7 AMPS | 120 V 11.4 AMPS 240 V 5.7 AMPS | 120 V 11.4 AMPS 240 V 5.7 AMPS | 120 V 14.0 AMPS 240 V 7.0 AMPS | 120 V 14.0 AMPS 240 V 7.0 AMPS | 120 V 14.0 AMPS 240 V 7.0 AMPS | 120 V 14.0 AMPS 240 V 7.0 AMPS |
| CABLES | 5/16" DIA. 20 FT 1 PART | 5/16" DIA. 20 FT 1 PART | 5/16" DIA. 33 FT 2 PART | 5/16" DIA. 33 FT 2 PART | 5/16" DIA. 33 FT 2 PART | 5/16" DIA. 50 FT 3 PART | 5/16" DIA. 50 FT 3 PART | 5/16" DIA. 30 FT 4 PART |
| CABLE SPREAD | 104" | 116" | 113" | 113" | 111" | 127" | 151" | 24" |
| SPEED OF LIFT INCHES / MINUTE | 40 | 32 | 20 | 16 | 26 | 17 | 14 | 22 |
| GUIDE POST HEIGHT | 7 FT. | 7 FT. | 7 FT. | 7 FT. | 10 FT. | 10 FT. | 10 FT. | 10 FT. |
| BUNKS | 2" x 8" x 12' | 2" x 8" x 12' | 2" x 8" x 12' | 2" x 8" x 12' | 3" x 10" x 14' | 3" x 10" x 16' | 3" x 10" x 16' | KEEL BEAM WITH CUSTOM SUPPORTS |
| PILING MOUNT BRACKETS | T-TYPE, SS, ADJUSTABLE | T-TYPE, SS, ADJUSTABLE | T-TYPE, SS, ADJUSTABLE | T-TYPE, SS, ADJUSTABLE | T-TYPE, SS, ADJUSTABLE | T-TYPE, SS, ADJUSTABLE | T-TYPE, SS, ADJUSTABLE | T-TYPE, SS, ADJUSTABLE |
| BOTTOM BEAM SIZE (2X) | 6" x 4" I-BEAM X 120" LG. | 6" x 4" I-BEAM X 144" LG. | 8" x 5" I-BEAM X 150" LG. | 8" x 5" I-BEAM X 150" LG. | 10" x 6" I-BEAM X 168" LG. | 12" x 7" L I-BEAM X 192" LG. | 12" x 7" H I-BEAM X 192" LG. | 12" x 7" L I-BEAM x 216" LG. |

For Our Nearest Dealer, Call Toll Free : (800) 669-3515

To Learn More About Our Products, Please Visit Us On The Web @ www.immboatlifts.com